RaiOn Thailand
บริษัท รายออน (ประเทศไทย)

STROM SERIES PUMP



MATERIALS

- Self-priming centrifugal pump
- High-performance hydraulics,TI.USA
- Pump materials: engineer plastic
- High-capacity strainer (3.2L) with transparent
- Easy maintenance Design for residential use

MOTOR

- 220-240V Standard range
- Protection Class: IP55
- Insulation Class: 155(F)


INSTALLATION SKETCH


Model	L (mm)
STROM 150	515
STROM 200	560
STROM 300	715
STROM 300 T	715

WORKING CONDITION

- Liquid temperature: 4°C – 50°C
- Strong temperaature: -10°C – +50°C
- Humidity: 95% Max
- Maximum water temperature 50°C

PERFORMANCE CURVES

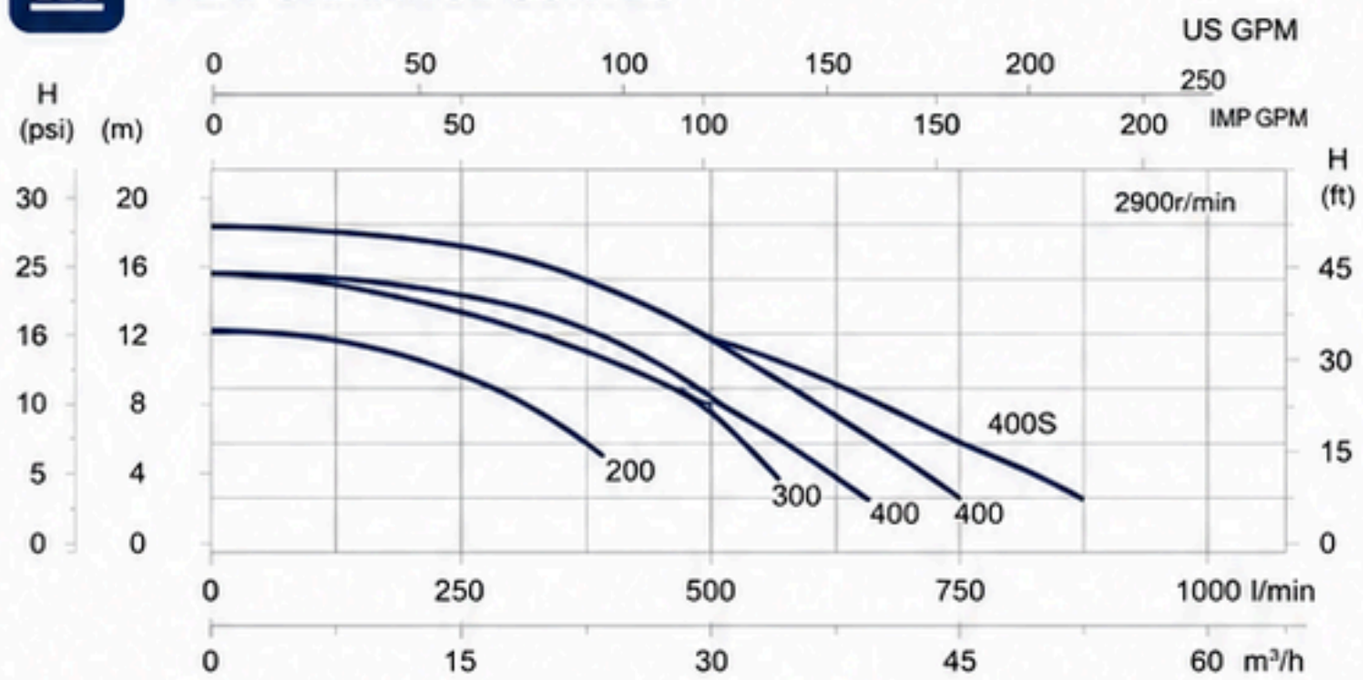

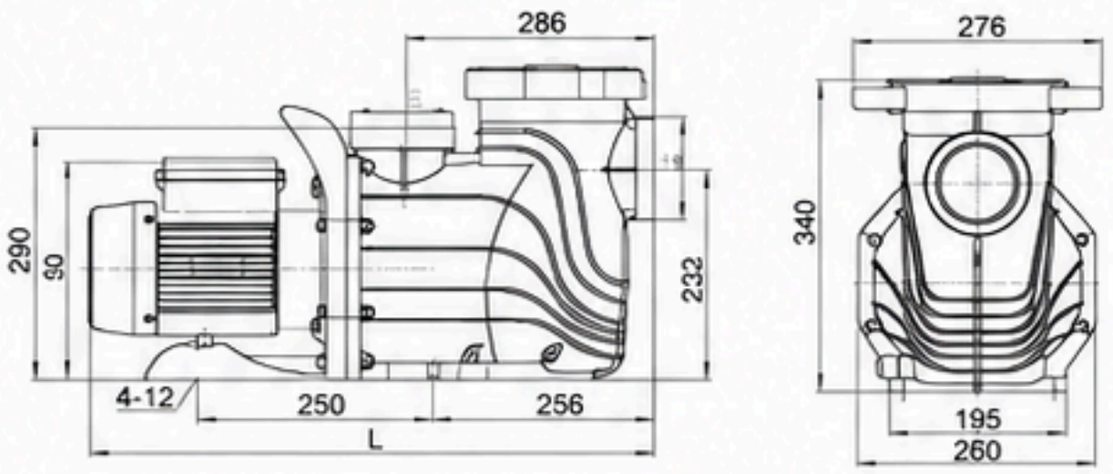

MODEL PARAMETER LIST

Model	Qmax (L/min)	Hmax (m)	Power(P1)		V/Hz	(Amps)	Fitting size(mm)		G.W (Kg)	Packing size (mm)
			kW	HP			2.5FBT	4.5BUTT		
SM-200	560	20	1.5	2	220-240/50	7	73	73	27.5	685 × 305 × 440
SM-300	715	22	2.2	3	220-240/50	10	75	75	30.5	685 × 305 × 440
SM-300T	715	22	2.2	3	380 /50	10	73	75	30.5	685 × 305 × 440
SM-400	800	23	3	4	220-240/50	14	60.3	76	32.5	715 × 305 × 440
SM-400S	980	19	3	4	220-240/50	14	63	90	31	715 × 305 × 440

* Specification may change without prior notice.