RaiOn Thailand
บริษัท รายออน (ประเทศไทย)

SAND FILTER
FIBERGLASS TOP-MOUNT




- High Filtration Performance
- Durable Fiberglass Structure
- Easy Maintenance
- Suitable for Residential & Commercial Pools

KEY FEATURES

- High quality fiberglass reinforced tank for long-lasting durability.
- Top-mount multiport valve for easy operation and maintenance.
- UV-resistant and weather-proof construction.
- Excellent filtration performance for crystal clear water.
- Suitable for swimming pools, hot springs, spas, aquariums and water parks.


MULTIPORT VALVE (TOP-MOUNT)

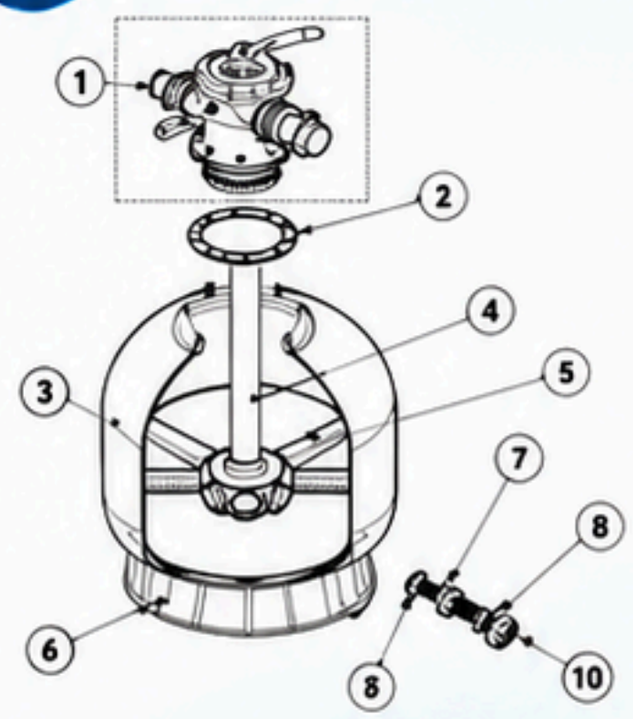

1. Multiport Valve
2. O-ring (Valve Cover)
3. Filter Tank
4. Internal Piping
5. Laterals
6. Base
7. Drain Plug
8. Union Connector
9. Drain Valve
10. Connector

MODEL & DIMENSIONS


Model	Dimension (mm)					
	A	B	C	D	E	F
FB550T	886	750	690	390	530	286
FB650T	1000	850	790	500	640	318
FB750T	1170	1005	920	710	750	390
FB800T	1200	1030	950	710	800	420
FB900T	1295	1160	1080	710	900	450

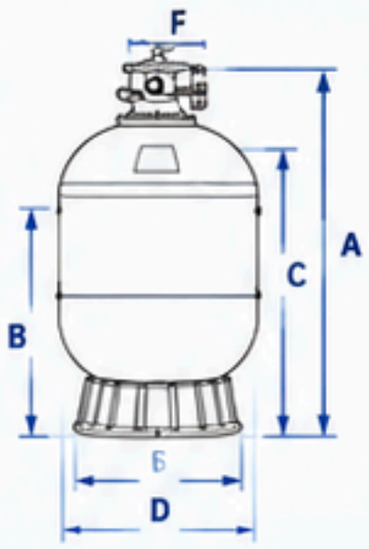

TECHNICAL SPECIFICATIONS

Tank Material	Fiberglass (Bobbin-wound)
Valve Type	Top-Mount Multiport Valve
Working Pressure	36 psi (2.5 bar)
Max. Temperature	43°C (109°F)
Sand Media	Silica Sand
Connection Size	1.5" / 2.0" (6-Valve)

Model	Diameter (mm)	Max Flow Rate (lpm / m³/h)	Valve Port (inch)	Sand Capacity (kg)
FB550T	530	185 / 11.10	1.5"	85
FB650T	640	260 / 15.60	1.5"	145
FB700T	700	336 / 20.16	2"	215
FB750T	750	396 / 23.00	2"	230
FB800T	800	415 / 24.90	2"	355
FB900T	900	520 / 31.20	2"	470

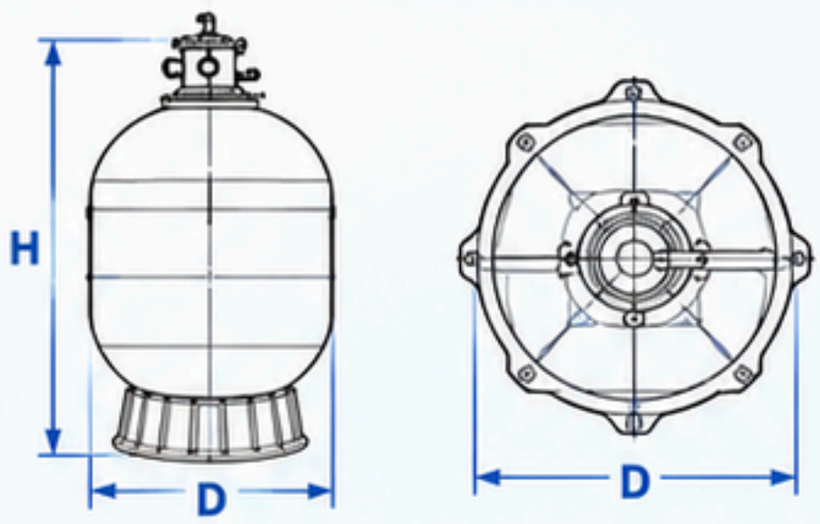

www.raion.co.th
Raion Pool
@raionth
082-071-7717